SOLIS FLOOR

DESCRIPTION

Solis is an innovatively simple and elegant suspension lamp that can be used as a pendant, hung from a wall, or as a freestanding portable luminaire to create a distinctive ambiance. The resulting piece is an engaging blend of light and shadow, casting shimmering rays and radiating patterns onto a space.

FIXTURE TYPE

Floor

LIGHT SOURCE

E27-75W PAR 30 NSP bulb

PRODUCT CODES

Solis FS 24 (White):	SOLI FS 24 WHT EU
Solis FS 24 (Black):	SOLI FS 24 BLK EU
Solis FS 24 (Brown):	SOLI FS 24 BRN EU
Solis FS 24 (Silver):	SOLI FS 24 SLV EU
Solis FS 48 (White):	SOLI FS 48 WHT EU
Solis FS 48 (Black):	SOLI FS 48 BLK EU
Solis FS 48 (Brown):	SOLI FS 48 BRN EU
Solis FS 48 (Silver):	SOLI FS 48 SLV EU

LIGHT CONTROL

Full range dim (in-line slide dimmer)

FEATURES

Ships flat-packed

SPECIFICATIONS

Voltage: 240V 50/60Hz Fire retardant polyester fabric Cable length: 13' (396cm) from lamp to dimmer (Field Cuttable for pendant), 6' (183cm) from dimmer to plug 2 year warranty

CERTIFICATIONS CE

UL listed components

Pablo



FINISHES

BROWN




DIMENSIONS

PACKAGING WEIGHT AND DIMENSIONS

Solis 24/48:	8.6LBS	14.5" X 13.5" X 8.5"
	3.9KGS	37cm X 34cm X 22cm

NOTES

Custom requests can be considered on volume orders





13″





SOLIS PENDANT

DESCRIPTION

Solis is an innovatively simple and elegant suspension lamp that can be used as a pendant, hung from a wall, or as a freestanding portable luminaire to create a distinctive ambiance. The resulting piece is an engaging blend of light and shadow, casting shimmering rays and radiating patterns onto a space.

FIXTURE TYPE

Pendant

LIGHT SOURCE

E27-75W PAR 30 NSP bulb

PRODUCT CODES

Solis 24 (White):	SOLI 24 WHT
Solis 24 (Black):	SOLI 24 BLK
Solis 24 (Brown):	SOLI 24 BRN
Solis 24 (Silver):	SOLI 24 SLV
Solis 48 (White):	SOLI 48 WHT
Solis 48 (Black):	SOLI 48 BLK
Solis 48 (Brown):	SOLI 48 BRN
Solis 48 (Silver):	SOLI 48 SLV
Solis 72 (White):	SOLI 72 WHT
Solis 72 (Black):	SOLI 72 BLK
Solis 72 (Brown):	SOLI 72 BRN
Solis 72 (Silver):	SOLI 72 SLV
Solis Wall Plate Cover:	SOLI WALL HW CVR





FINISHES

WHITE

SOLIS 24

1.3″

(3.3cm) =

156" (396cm)

MAX

24" (61cm)

4.8″

(12.25cm)





LIGHT CONTROL

Full range dim (in-line slide dimmer) Can be hard-wired

FEATURES

Ships flat-packed Full-range dim

SPECIFICATIONS

Voltage: 120V or 240V 50/60Hz Fire retardant polyester fabric Cable length: 13' (396cm) from lamp to dimmer (Field Cuttable for pendant), 6' (183cm) from dimmer to plug 2 year warranty

CERTIFICATIONS


CE UL listed components

PACKAGING WEIGHT AND DIMENSIONS

Solis 24/48/72:	8.6LBS	14.5" X 13.5" X 8.5"
	3.9KGS	37cm X 34cm X 22cm

NOTES

Custom requests can be considered on volume orders









SOLIS CHANDELIER

DESCRIPTION

Solis is an innovatively simple and elegant suspension lamp that can be hung in groupings of 3 and 5 fixtures to create a striking composition. The resulting piece is an engaging blend of light and shadow, casting shimmering rays and radiating patterns onto a space.

FIXTURE TYPE

Chandelier

LIGHT SOURCE

E27-75W PAR 30 NSP bulb

PRODUCT CODES

Solis 24 (White):	SOLI 24 WHT
Solis 24 (Black):	SOLI 24 BLK
Solis 24 (Brown):	SOLI 24 BRN
Solis 24 (Silver):	SOLI 24 SLV
Solis 48 (White):	SOLI 48 WHT
Solis 48 (Black):	SOLI 48 BLK
Solis 48 (Brown):	SOLI 48 BRN
Solis 48 (Silver):	SOLI 48 SLV
Solis 72 (White):	SOLI 72 WHT
Solis 72 (Black):	SOLI 72 BLK
Solis 72 (Brown):	SOLI 72 BRN
Solis 72 (Silver):	SOLI 72 SLV
26" Chandelier Canopy:	CHND CAN 26



Hard-wired

FEATURES Ships flat-packed Full-range dim

SPECIFICATIONS

Voltage: 120V or 240V 50/60Hz Fire retardant polyester fabric Cable length: 13' (396cm) from lamp to dimmer (Field Cuttable for pendant), 6' (183cm) from dimmer to plug 2 year warranty

CERTIFICATIONS


CE UL listed components

PACKAGING WEIGHT AND DIMENSIONS

	DIMENSIO	
Solis 24/48/72:	8.6LBS	14.5" X 13.5" X 8.5"
	3.9KGS	37cm X 34cm X 22cm
Chandelier canopy 26":	30LBS	32'' X 32'' X 6''
	13.6KGS	81cm X 81cm X 15cm

NOTES

Custom requests can be considered on volume orders

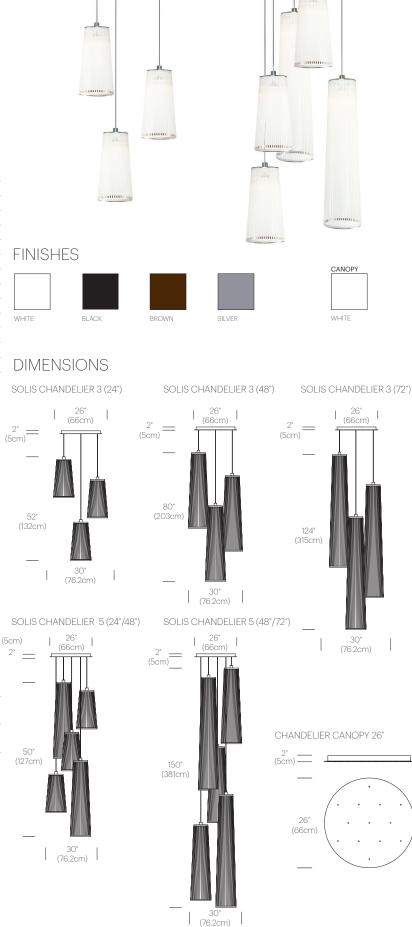

Pablo